
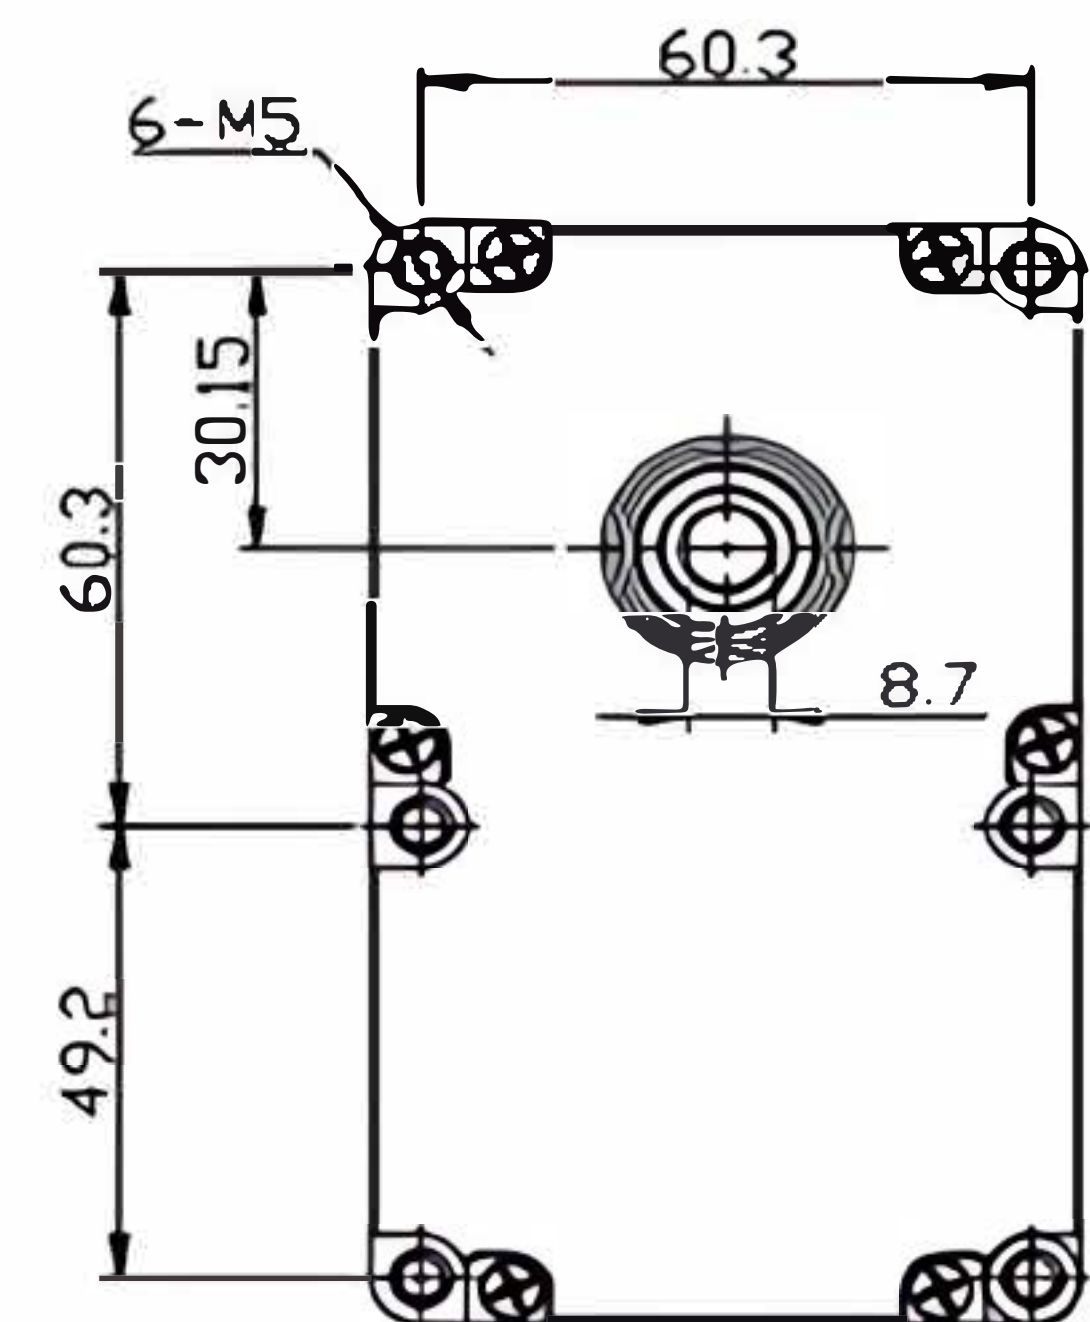


Technical drawing of a mechanical assembly, likely a pump or motor component, showing dimensions in millimeters. The drawing includes a top view and a side view. Key dimensions are:

- Overall width: 70
- Distance from left edge to center of top hole: 60.3
- Distance from left edge to center of bottom hole: 30.15
- Overall height: 119
- Distance from top edge to center of top hole: 60.3
- Distance from top edge to center of bottom hole: 64
- Distance from right edge to center of top hole: 500 ± 20
- Distance from right edge to center of bottom hole: 61
- Top hole specification: 6 - Ø5.2

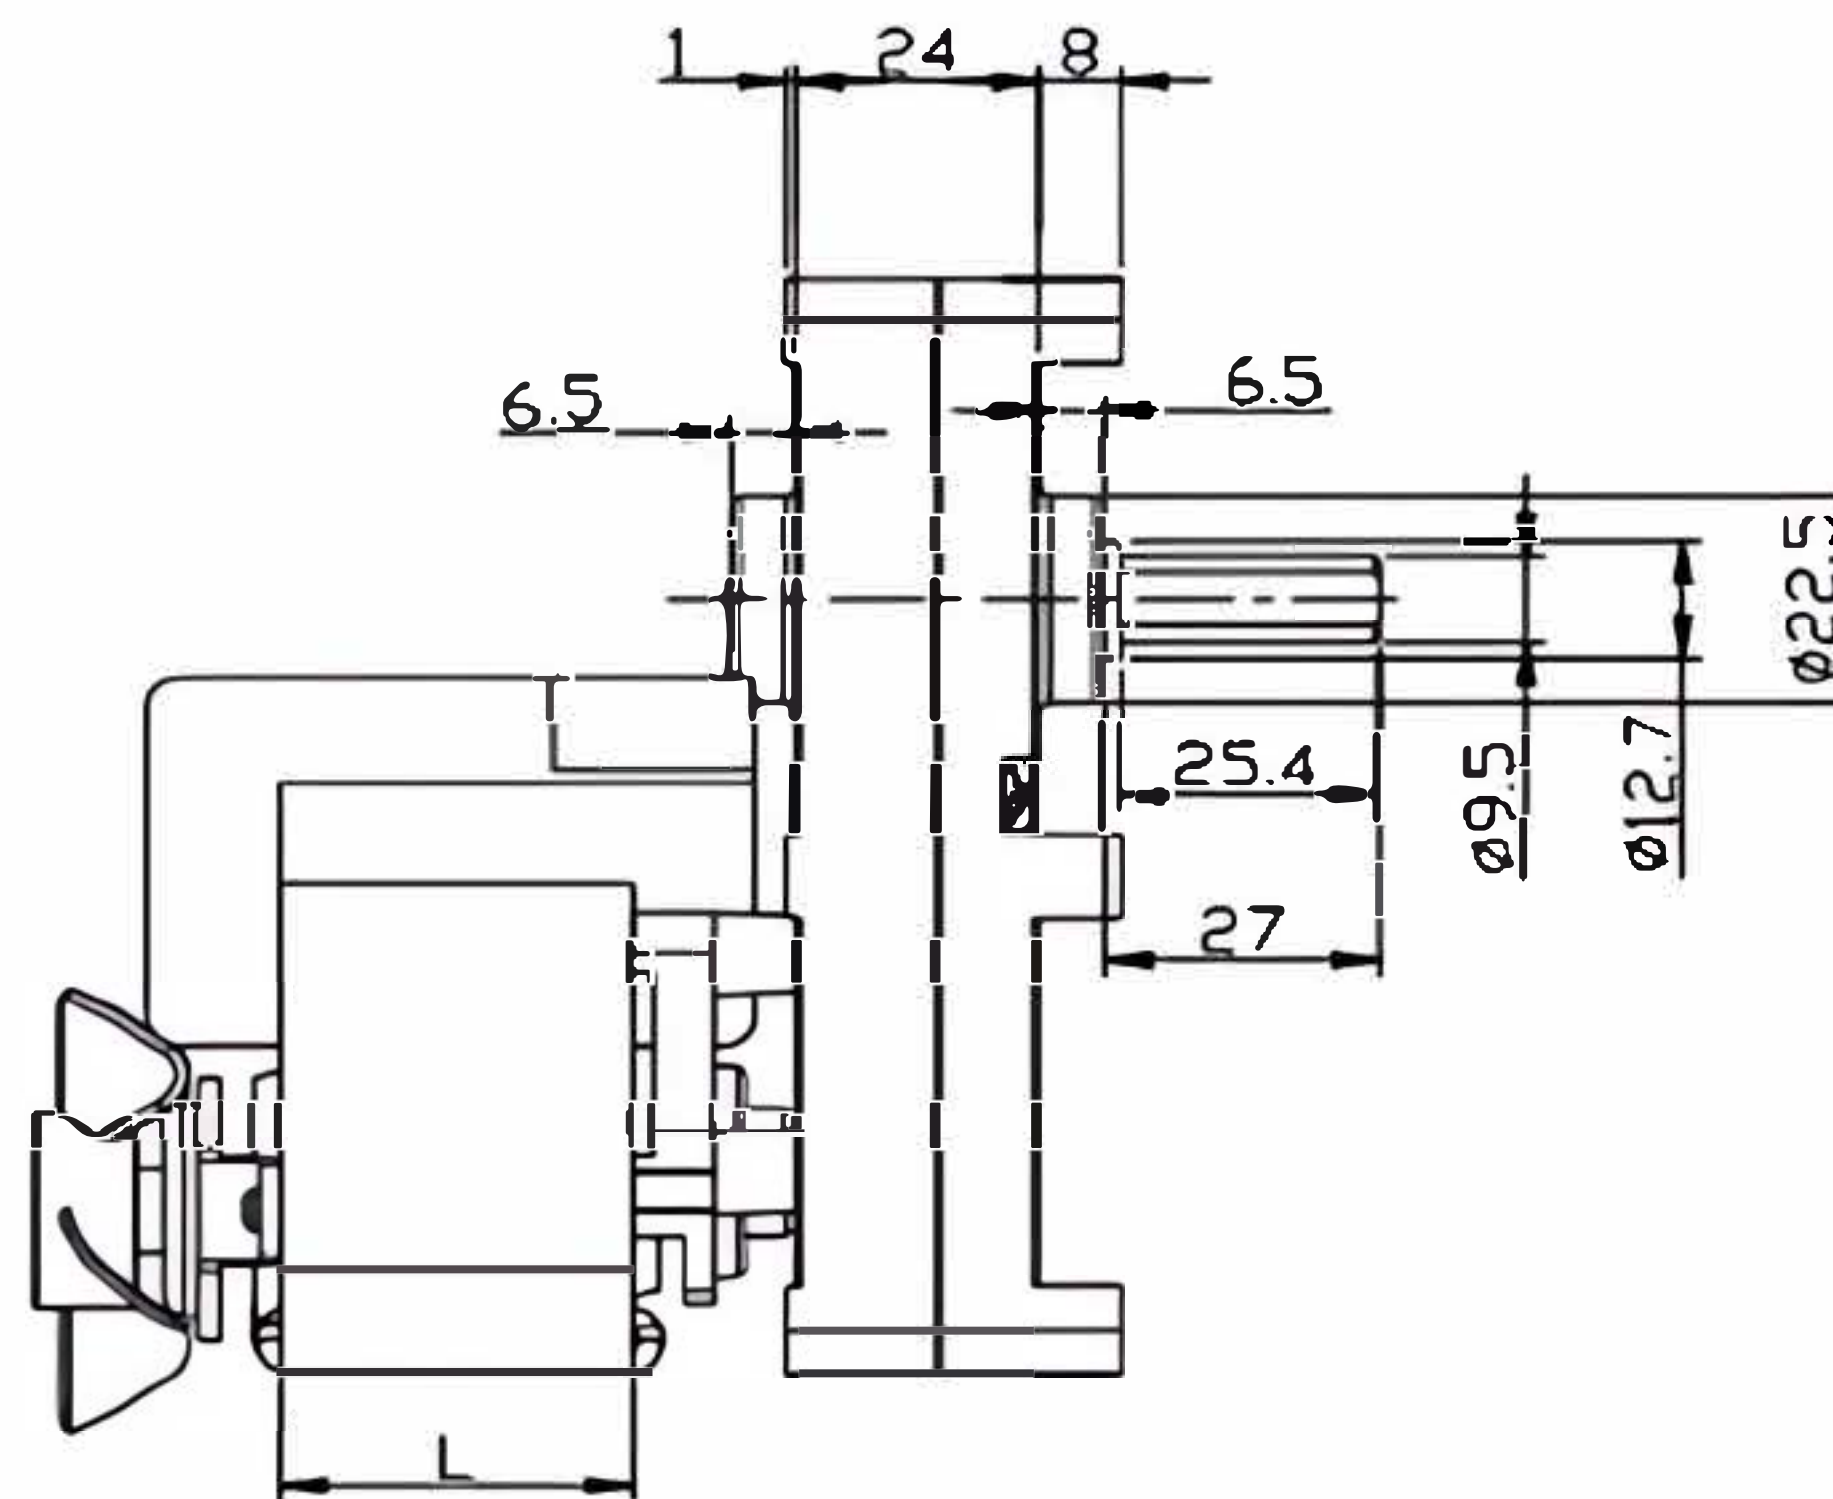

Reduction ratio	$\frac{1}{251}$	$\frac{1}{389}$	$\frac{1}{590}$	$\frac{1}{722}$	$\frac{1}{897}$	$\frac{1}{1269}$	$\frac{1}{1601}$	$\frac{1}{1929}$	$\frac{1}{2708}$	$\frac{1}{3385}$	$\frac{1}{5078}$
Numberofgeartrans	4					5				6	
Ratedspeed (rpm) at60Hz	11.1	7.1	4.7	3.8	3.1	2.2	1.7	1.4	1.0	0.8	0.5
GF-YJ61-16 L=16 (kgf.cm) Rated torque	22.8	35.4	53.7	65.7	81.6	104	132	159	200	200	200
GF-YJ61-26 L=26 (kgf.cm) Rated torque	35.9	55.6	84.4	103	128	164	200	200	200	200	200
GF-YJ61-30 L=30 (kgf.cm) Rated torque	45.7	70.8	107	131	163	200	200	200	200	200	200
GF-YJ61-35 L=35 (kgf.cm) Rated torque	57.1	88.5	134	164	200	200	200	200	200	200	200
GF-YJ61-40 L=40 (kgf.cm) Rated torque	65.5	101	153	187	200	200	200	200	200	200	200
GF-YJ61-50 L=50 (kgf.cm) Rated torque	84.8	131	199	200	200	200	200	200	200	200	200
Note :	Voltage can make as customers' request .										
Packing Details	CTN size : 31X30XH10cm 4pcs/CTN N.W.7kgs										